

# **RAM** **SPREADERS**

## **3400 & 3500 series**

**All Electric Telescopic Spreaders  
for Container Lifting Cranes**



**Performance Through Innovation**



The RAM 3400 and 3500 series of All-Electric Telescopic Spreaders bring innovative standards of reliability, low maintenance and performance to container handling with the RAM 3400 series spreaders designed for ship-to-shore cranes and RAM 3500 for yard stacking cranes.

The use of electrical drives and components eliminate hydraulic systems, improve uptime and provide a safer, more environmentally friendly operation.

Designed to handle 20ft, 40ft and 45ft containers, the 3400 and 3500 series provide telescopic handling flexibility for containers up to 40 tonnes with a lightweight version available in the 3500 series.

### **Quality Design and Construction**

All RAM spreaders are designed to DIN 15018 and to other applicable international standards. Twin double box centre section, internally stiffened telescoping beams and steel wear plates on end beams are just some of the reasons why the 3400 and 3500 series are built to last and minimise downtime. Automated welding ensures consistent quality and all RAM spreaders are tested to 125% of designed load before delivery. Motors and gearboxes are mounted on the end beams in well protected locations, readily accessible for maintenance.

### **Flipper / Gather Guides**

The 3400 series spreaders for ship-to-shore cranes are fitted with electric retractable flippers on each corner as standard. The flipper design helps gather the container smoothly and absorb the impact between the spreader and container.

The 3500 series spreaders for yard stacking cranes are fitted with four fixed guides as standard.

### **Twistlocks**

The floating twistlocks allow the operator to quickly locate and lock the spreader onto a container. Proximity switches indicate the locked and unlocked condition of the twistlocks.


### **Electrical System**

The spreader electrical system is designed to operate at the same voltage as the crane and is in accordance with IEC/IEEE Regulations. The spreader is designed with an on-board logic control system. An enclosure is fitted to the centre section from where cables run to the various electrical components on the spreader. A multi-pin electrical socket is fitted to one side of the enclosure to accept the multi-pin plug from the headblock. Electrical control and overload protection is installed in the enclosure for the spreader's electrical system. All RAM spreaders use electrical systems built from high quality components supplied by leading manufacturers and are readily available from suppliers worldwide.

## TECHNICAL DATA


### 3400 series for ship-to-shore cranes with flipper arms

Model	Container Size	Capacities	Tare Weight
3410	1 x 20ft / 40ft	40t SWL	9.5t
3420	1 x 20ft / 40ft / 45ft	40t SWL	10.0t

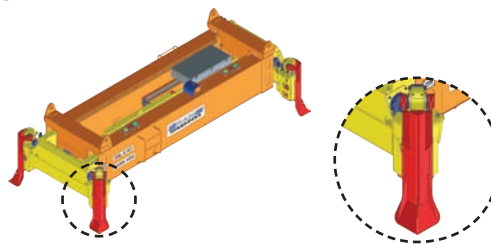

### 3500 series for yard stacking cranes with fixed guides

Model	Container Size	Capacities	Tare Weight	Applications
3510	1 x 20ft / 40ft	40t SWL	6.8t	Lightweight design
3520	1 x 20ft / 40ft / 45ft	40t SWL	7.8t	Lightweight design
3530	1 x 20ft / 40ft	40t SWL	8.5t	
3540	1 x 20ft / 40ft / 45ft	40t SWL	9.0t	



## Operational Speeds

### Function

Twistlock	1.5 sec
Flipper	5 sec
Telescopic - 20ft ~ 40ft	28 sec
Telescopic - 20ft ~ 45ft	34 sec

### Power Rating

Telescopic System	3.7 kW
Twistlock	2 x 0.4 kW



## OPTION FEATURES

RAM Spreaders offers a wide range of options to provide the most productive spreader specifications, including:

### ASi Communications

All spreader functions are controlled by ASi communications. The ASi system simplifies the installation of electrical components, provides efficient diagnostics and makes it easy to feed data to the crane's control system. It can be fitted with a controller on the spreader or can be extended back to the crane.

### On-Board PLC

RAM Spreaders can be fitted with an on-board PLC for logic control and a simplified control system.

### Twin Twenty Container Detection System

Ensures that the operation cannot handle two 20ft container instead of a 40ft container.

### Height Monitoring System

A valuable safety and productivity feature, signalling to the crane operator when the spreader is approaching the top of the container.

RAM developed its product range responding to customers' operational needs and future expectations. We offer bespoke equipment based on our wide range of spreader models and options to deliver the most effective and practical container-handling solutions.

RAM Spreaders is the world's leading independent, dedicated specialist spreader manufacturer. The company has manufacturing facilities in China; service and repair centres in Singapore and UK; and sales and after-sales service support throughout Asia, Americas, Europe, Middle East and Africa.

## PRODUCT RANGE

A comprehensive range of product for:

- Ship-to-Shore Cranes
- Yard Stacking Cranes
- Mobile Harbour Cranes

Product range includes:

- Electro-Hydraulic Spreaders (Single and Twinlift)
- All-Electric Spreaders (Single and Twinlift)
- Light Weight Spreaders
- Overheight Spreaders
- Tandem Headblock
- Revolver / Rotating Spreaders
- PinSmart (Automated Twistlock Handling Machine)
- Pipe Spreaders

## RAM Lifting Technologies Pte Ltd

### Singapore

Tel: +65 6716 9400

Fax: +65 6261 1300

### China

Tel: +86 512 52297222

Fax: +86 512 52297223


### UK

Tel: +44 (0) 1695 556355

Fax: +44 (0) 1695 556356

For all sales enquires, please email to :

**[sales@ramspreaders.com](mailto:sales@ramspreaders.com)**



Please visit our website for other national and regional agents

**[www.ramspreaders.com](http://www.ramspreaders.com)**

Printed on September 2022